


STANDARD:

- Investment Casting Body & Cap
- ASNI 150LB
- Wheel Handle Operation
- Casting Handle
- Design Standard:ASME B16.34
- Flange Standard:ASME B16.5
- Inspection Standard:API598

Technical Date			
Test Pressure	Shell Test	3.0	MPA
	Tightness Test	3.5	
	Gas-Tightness Test	0.8	
Max Working temperature		-40°C~+250°C	
Applicable Medium:Water,Oil,Gas,Acid			



MJ1020

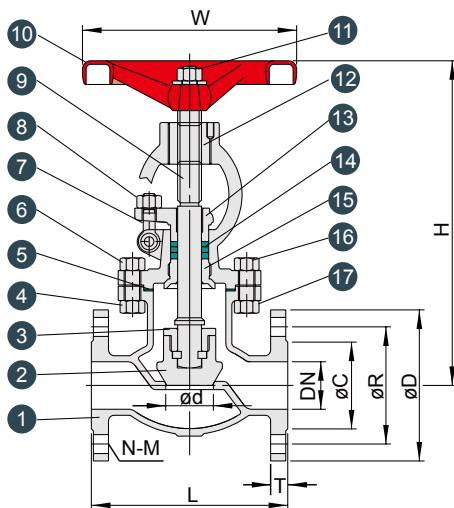

No.	PART NAME	MATERIAL		
1	Body	CF8M	CF8	WCB
2	Disc	CF8M	CF8	WCB
3	Cover	CF8M	CF8	WCB
4	Bolt	SS304		
5	Gasket	PTFE		
6	Nut	SS304		
7	Eye Bolt	SS304		
8	Nut	SS304		
9	Stem	SS316	SS304	F420
10	Wheel Handle	CAST IRON		
11	Stem Nut	SS304		
12	Bonnet	CF8M	CF8	WCB
13	Gland	CF8		
14	Stem Packing	PTFE		
15	Gland	SS316	SS304	
16	Nut	SS304		
17	Bolt	SS304		

Unit:mm

SIZE	d	L	H	W	C	R	D	T	N	M
1/2"	15	108	195	120	35	60.5	89	11.2	4	16
3/4"	20	117	210	120	43	70	98	11.2	4	16
1"	25	127	240	140	51	80	108	12.0	4	16
1¼"	32	140	300	180	64	89	117	12.7	4	16
1½"	40	165	395	200	73	98.5	125	17.9	4	16
2"	50	178	400	200	92.1	121	150	19.5	4	19
2½"	65	191	435	200	105	140	180	22.7	4	19
3"	80	203	515	250	127	152	190	24.3	4	19
4"	100	229	595	280	157	191	230	24.3	8	19
5"	125	254	725	280	186	216	255	24.3	8	22
6"	150	267	780	300	216	242	280	25.9	8	22
8"	200	292	975	350	242	299	345	29	8	22